




Torrette di segnalazione a LED Ø 30, 50 e 70 mm  
 Alimentazione 12-24 VAC/DC  
 Sistema modulare, componibile fino a 5 moduli  
 Elevato grado di protezione (IP65)  
 Luce fissa (DTS-LED 30-50-70)  
 Elevata luminosità fino a 18 LED per modulo  
 Frequenza dell'allarme 60~80 al min.  
 Volume modulo sonoro 70 dB ad 1 m (standard)  
 Supporto in policarbonato  
 Lente ABS  
 Basi in alluminio  
 Elevata resistenza agli agenti aggressivi  
 Conforme alla direttiva RoHS e alle norme  
 EN 60073, EN 60947.


*LED signal tower lights Ø 30, 50 and 70 mm  
 input voltage 12-24 AC/DC  
 Modular design, composable up to 5 modules  
 High IP protection (IP65)  
 Steady light (DTS-LED 30-50-70)  
 High light intensity up to 18 LED each module  
 Buzzer frequency 60~80 min.  
 Up to 70 dB at 1 m (standard)  
 Polycarbonate base  
 ABS lens  
 Aluminum support  
 High resistance to aggressive agents  
 RoHS and EN 60073, EN 60947 compliant.*



Modulo / Module	DTS-LED 30	DTS-LED 50	DTS-LED 70	Alimentazione Input voltage	Assorbimento Current draw [mA] nominal / max @ 24V	Intensità luminosa Luminous intensity [mcd]
	Codice Code	Codice Code	Codice Code			
1 sonoro / buzzer	-	347 50 8 024 5	347 70 8 024 5	12/24 VDC	15~20 / 30	-
2 sonoro alta intensità high intensity buzzer	-	-	347 70 7 024 5		150~200 / 300	-
3 ● rosso - red	347 31 2 024 5	347 50 2 024 5	347 70 2 024 5	12/24 VDC	35~45 / 80	4000
4 ● giallo - yellow	347 31 4 024 5	347 50 4 024 5	347 70 4 024 5			
5 ● verde - green	347 31 3 024 5	347 50 3 024 5	347 70 3 024 5			
6 ○ bianco - white	347 31 1 024 5	347 50 1 024 5	347 70 1 024 5			
7 ● blu - blue	347 31 5 024 5	347 50 5 024 5	347 70 5 024 5			



### Dimensioni / Dimensions

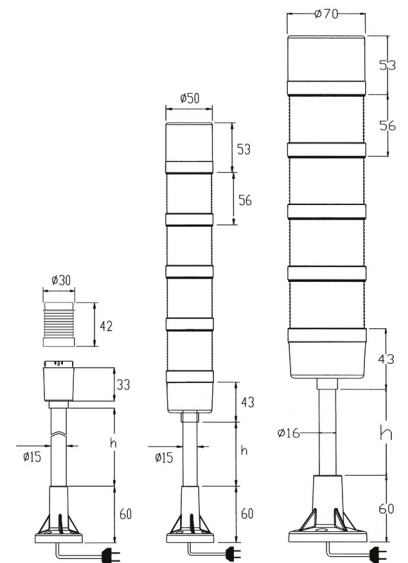

DTS-LED 30		Codici per basi - Base codes		
		h: 10 mm	h: 100 mm	h: 250 mm
S	base S + coperchio - S base + cap	347 31 0 001 5	347 31 0 010 5	347 31 0 100 5
L	base L + coperchio - L base + cap	347 31 0 002 5	347 31 0 020 5	347 31 0 200 5
R	base R + coperchio - R base + cap	347 31 0 003 5	347 31 0 030 5	347 31 0 300 5
T	base T + coperchio - T base + cap	347 31 0 004 5	347 31 0 040 5	347 31 0 400 5
DTS-LED 50				
S	base S + coperchio - S base + cap	347 50 0 001 5	347 50 0 010 5	347 50 0 100 5
L	base L + coperchio - L base + cap	347 50 0 002 5	347 50 0 020 5	347 50 0 200 5
R	base R + coperchio - R base + cap	347 50 0 003 5	347 50 0 030 5	347 50 0 300 5
T	base T + coperchio - T base + cap	347 50 0 004 5	347 50 0 040 5	347 50 0 400 5
P	base P + coperchio - P base + cap	347 50 0 005 5	-	-
DTS-LED 70				
S	base S + coperchio - S base + cap	347 70 0 001 5	347 70 0 010 5	347 70 0 100 5
L	base L + coperchio - L base + cap	347 70 0 002 5	347 70 0 020 5	347 70 0 200 5
R	base R + coperchio - R base + cap	347 70 0 003 5	347 70 0 030 5	347 70 0 300 5
T	base T + coperchio - T base + cap	347 70 0 004 5	347 70 0 040 5	347 70 0 400 5
P	base P + coperchio - P base + cap	347 70 0 005 5	-	-