


DTS-LED ARM-4 / DTS-LED SPOT-4

illuminazione a LED
per macchinari
Machinery LED lighting

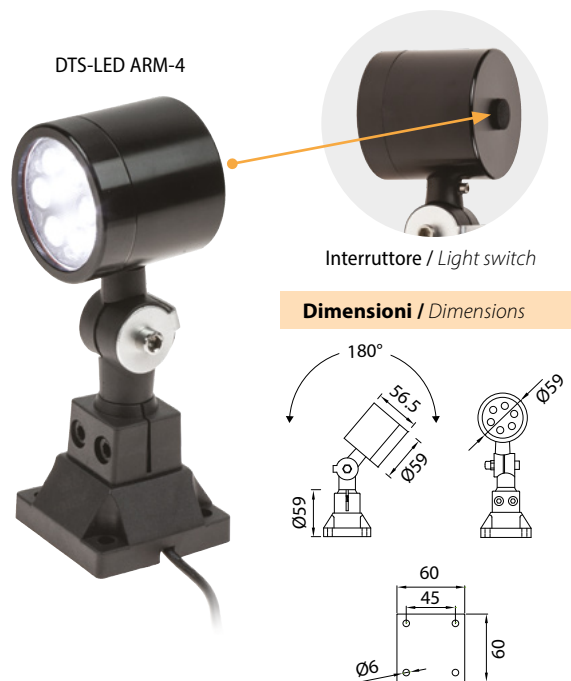

MODELLI Model List	Codice Code	Assorbimento Power cons.	Tensione d'ingresso Input voltage	Fascio luminoso Beam	Ø Faretto Ø Lamp	Peso Weight
DTS-LED ARM-4	3470200008	5 W	24 VDC ± 15%	45°	Ø 59 mm	440 g
DTS-LED SPOT-4	3470200009		24 VDC stab. ± 3%			200 g

Grado di protezione / Protection level	IP65
Efficienza luminosa / Luminous efficiency	75 lm/W
Temperatura operativa / Operating temperature	<60°
Durata / Lifespan	50000 h
CCT	6000-6500K
CRI	>82Ra
Corpo / Housing	Lega di alluminio / Aluminum alloy
Modalità di montaggio / Mounting method	Base fissa / Fixed base
Interruttore / Light switch	Incorporato / Incorporated (ARM-4)
ingresso alimentazione / Power supply input	(ARM-4) cavo 2m / 2 mt cable (SPOT-4) connettore M12 4 poli maschio / M12 connector 4 poles male

