


DTS-LED EKOS MAG

illuminazione a LED
per macchinari
Machinery LED lighting

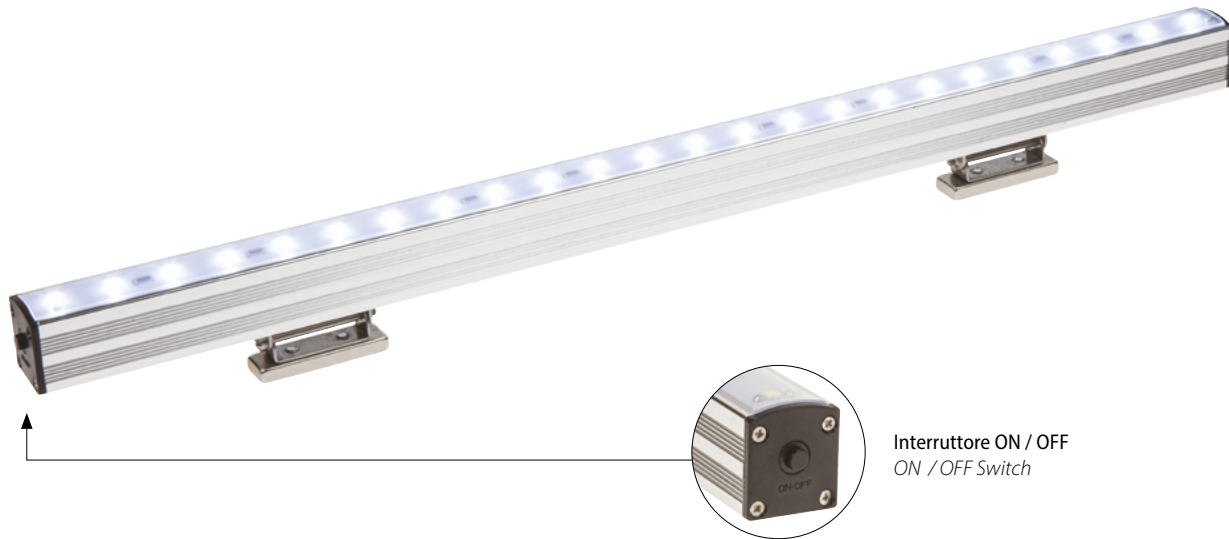

IP20

-35 +50
°C

CE

RoHS
COMPLIANT


Interruttore ON / OFF
ON / OFF Switch

- Barra a LED con fissaggio magnetico
- Dotata di interruttore on/off
- Fornita con alimentatore 230VAC/24VDC con 2 metri di cavo e connettore dedicato
- Consumo 5 W
- CCT 5000 K
- Materiali: corpo lampada in alluminio + diffusore in PC
- Protezione IP20

Grado di protezione / Protection level	IP20
Temperatura operativa / Operating temperature	-35...+50°C
Durata / Lifespan	35000 h

Cablaggi / Wiring

- LED bar with magnetic mounting
- Equipped with ON/OFF switch
- Supplied with 230VAC/24VDC power supply, with 2 meters of cable and dedicated connector
- Power consumption 5 W
- CCT 5000 K
- Materials: aluminum body + PC cover
- Protection level IP20

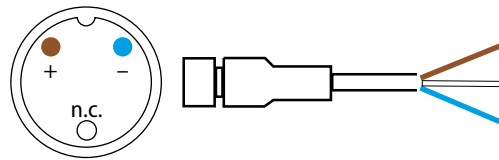

MODELLI Model List	Codice Code	Potenza Power	Tensione d'ingresso Input voltage	Flusso luminoso Luminous flux	Fascio luminoso Beam	Dimensioni Case size W x H x D	Peso Weight
DTS-LED EKOS MAG	3470140501	4 W	24 VDC	400 lm	120°	402 x 23.4 x 21	200 g

Dimensioni / Dimensions

