
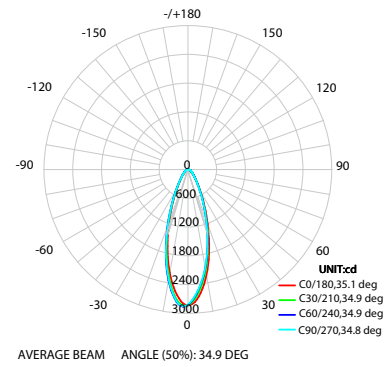



MODELLI Model List	Codice Code	Potenza Power	Tensione d'ingresso Input voltage	Flusso luminoso Luminous flux	Fascio luminoso Beam	Dimensioni Case size XYZ	Peso Weight
DTS-LED LINE2 280	3470120280	8 W	24 VDC	680 lm	60°	280 x 28 x 41	350 g
DTS-LED LINE2 380	3470120380	12 W		1000 lm		480 g	
DTS-LED LINE2 480	3470120480	16 W		1330 lm		610 g	
DTS-LED LINE2 580	3470120580	20 W		1600 lm		740 g	

Grado di protezione / Protection level	IP65
Efficienza luminosa / Luminous efficiency	85 lm/W
Temperatura operativa Working temperature	-20...+45 °C
Durata / Lifespan	50000 h
CCT	5500-6000 K
CRI	≥80%
Modalità di montaggio Mounting method	Fissaggio con viti Fixed by screws
Lunghezza cavo / Cable length	0,5 m

### Curve fotometriche / Photometric data: mod. 580

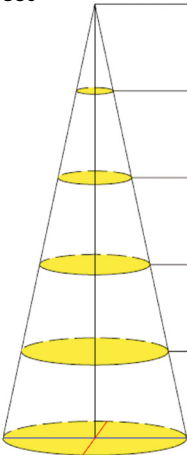

mod. 580	Altezza Height	Area	LUX max. / med.	
		1 m	Ø 0.60 m	2855
	2 m	Ø 1.25 m	713	457
	3 m	Ø 1.90 m	317	203
	4 m	Ø 2.50 m	178	114
	5 m	Ø 3.15 m	114	73

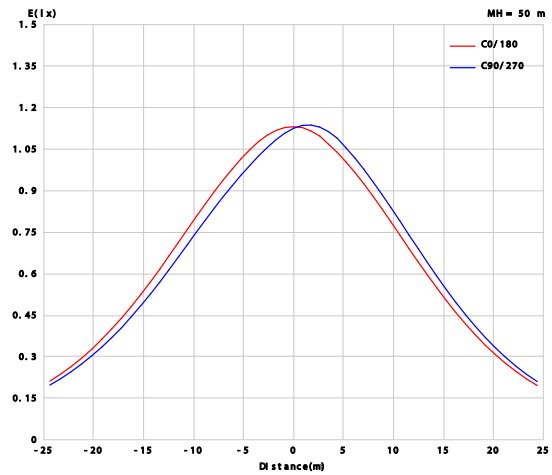

### Dimensioni / Dimensions

L1	L2
280	255~265
380	355~365
480	455~465
580	555~565

