


DTS-LED LINE 2


illuminazione a LED
per macchinari
Machinery LED lighting



MODELLI Model List	Codice Code	Potenza Power	Tensione d'ingresso Input voltage	Flusso luminoso Luminous flux	Fascio luminoso Beam	Dimensioni Case size XYZ	Peso Weight
DTS-LED LINE2 280	3470120280	8 W	24 VDC	680 lm	60°	280 x 28 x 41	350 g
DTS-LED LINE2 380	3470120380	12 W		1000 lm		480 g	
DTS-LED LINE2 480	3470120480	16 W		1330 lm		610 g	
DTS-LED LINE2 580	3470120580	20 W		1600 lm		740 g	


Grado di protezione / Protection level	IP65
Efficienza luminosa / Luminous efficiency	85 lm/W
Temperatura operativa Working temperature	-20...+45 °C
Durata / Lifespan	50000 h
CCT	5500-6000 K
CRI	≥80%
Modalità di montaggio Mounting method	Fissaggio con viti Fixed by screws
Lunghezza cavo / Cable length	0,5 m

Curve fotometriche / Photometric data: mod. 580

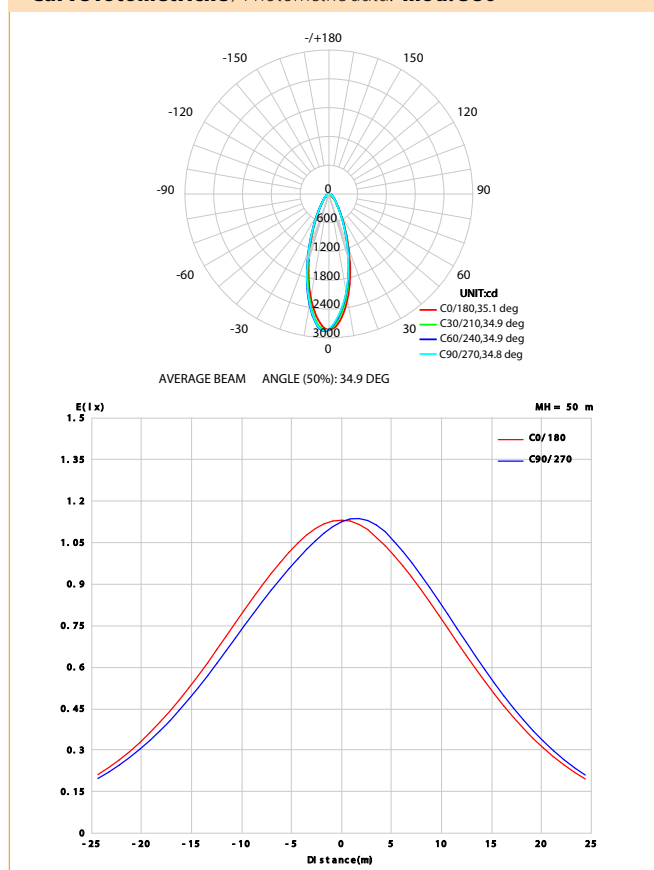

mod. 580	Altezza Height	Area	LUX max. / med.	
	1 m	Ø 0.60 m	2855	1828
2 m	Ø 1.25 m	713	457	
3 m	Ø 1.90 m	317	203	
4 m	Ø 2.50 m	178	114	
5 m	Ø 3.15 m	114	73	

Dimensioni / Dimensions

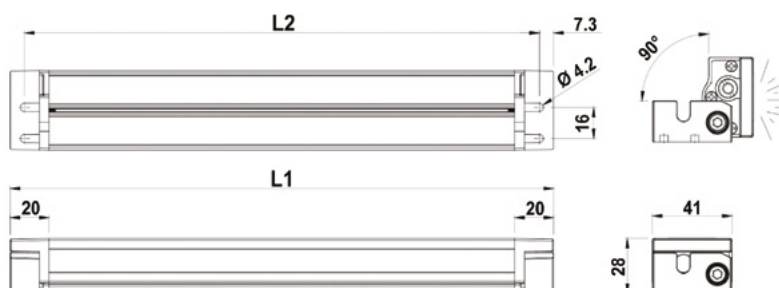

L1	L2
280	255~265
380	355~365
480	455~465
580	555~565