



DTS-LED POINT 6



DTS-LED POINT 12



DTS-LED POINT 18



DTS-LED POINT 24




DTS-LED POINT 40


Progettato per l'utilizzo in condizioni ambientali critiche.
Le alette di dissipazione assicurano un rapido smaltimento del calore prolungando così la durata dei LED.
Ampio intervallo di tensioni di alimentazione accettate.
Luce bianca (6500 - 7500 K).
Elevata efficienza ottica (93%).
LED alimentati singolarmente: la rottura di uno di essi non compromette il funzionamento del corpo luminoso.
Protezione: IP67.
Corpo in alluminio pressofuso.
Staffa in acciaio inox.
Optica in policarbonato.
Temperatura operativa in continuo: $-20^{\circ}\text{C} \div +60^{\circ}\text{C}$. (di picco: $+85^{\circ}\text{C}$).
Durata minima LED: 50.000 ore ($T_a=25^{\circ}\text{C}$).
Non adatti in presenza di olii refrigeranti o lubrificanti.

*Designed to be used in extreme environments.
The dissipation fins ensure fast heat transfer increasing LED lifespan.
Wide input voltage range accepted.
White light (6500K).
High optical efficiency (93%).
Led powered singularly: one single failure doesn't compromise functionality of the lighting body.
IP67 protection.
Die-cast aluminum body.
Stainless steel bracket.
Polycarbonate lens.
Continuous operating temperature: $-20^{\circ}\text{C} \div +60^{\circ}\text{C}$ (peak: $+85^{\circ}\text{C}$).
Minimal LED lifespan: 50.000 hrs ($T_a=25^{\circ}\text{C}$).
Not suitable when chill oils or lubricants are present.*

Dimensioni / Dimensions

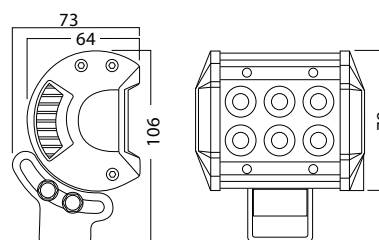

Lunghezza cavo / Cable length = 2 m



| MODELLI Model List | Codice Code | Potenza@12V Power @12V | Tensione d'ingresso Input voltage | Flusso luminoso Luminous flux | Fascio luminoso Beam | Dimensioni Case size W x H x D |
|-----------------------|----------------|---------------------------|--------------------------------------|----------------------------------|-------------------------|-----------------------------------|
| DTS-LED POINT 6 | 3470600001 | 12 W | 12÷30 VDC | 1260 lm | 60° | 96 x 79 x 64 mm |
| DTS-LED POINT 12 | 3470600002 | 26 W | | 2520 lm | | 164 x 79 x 64 mm |
| DTS-LED POINT 18 | 3470600003 | 38 W | | 3890 lm | 232 x 79 x 64 mm | |
| DTS-LED POINT 24 | 3470600004 | 40 W | | 40180 lm | 10° | 355 x 80 x 85 mm |
| DTS-LED POINT 40 | 3470600005 | 46 W | | 47800 lm | 560 x 80 x 85 mm | |