

STEEL_line




Corpo in acciaio Inox SS316L
Stainless steel body SS316L



MODELLI Model List	Codice Code	Potenza Power	Tensione ingresso Input voltage	Flusso luminoso Luminous flux	Fascio luminoso Beam	Dimensioni Case size XYZ	Peso Weight
DTS-LED R8M600	8000017605	50 W	230 VAC	6500 lm	120°	407 x 287 x 80.7 mm	2400 g

Grado di protezione / Protection level	IP66
Efficienza luminosa / Luminous efficiency	>120 lm/W
Alimentazione / Input voltage	230VAC
Temperatura operativa / Operating temperature	-20...+40 °C
Durata / Lifespan	90000 h
CCT	4000 K
CRI	K ≥80Ra
Corrente nominale / Rated current	2 A
Connessione / Connection	Cavo lunghezza custom Wire customized length
Modalità di montaggio / Mounting method	Staffa superiore / Top bracket

Curva fotometrica / Photometric data

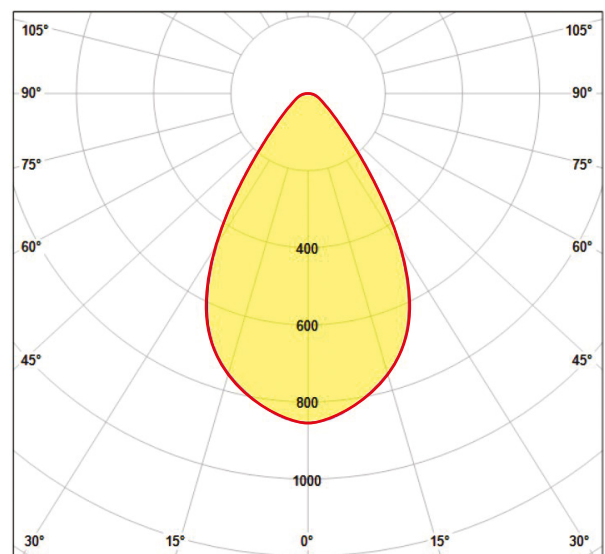

Dimensioni / Dimensions

