

DTS-LED 70 LC

Torrette di segnalazione a LED diametro 70 mm con BUZZER integrato

Design MODULARE: è possibile rimuovere facilmente i moduli

Funzioni programmabili con DIP SWITCH:

- Buzzer OFF/bassa (40dB, default) / alta intensità (85dB)
- Buzzer continuo (default) / intermittente
- Luce fissa (default) / intermittente per ogni colore

Disponibile con i seguenti colori:

- 3 livelli, colori RYG
- 4 livelli, colori RYGB
- 5 livelli, colori RYGBW

Materiali: corpo in ABS + lenti in PC

Base di fissaggio con stelo di 165 mm

Grado di protezione: IP53

Linea comune sia PNP che NPN

Tensione di alimentazione 24 VDC

Temperatura di lavoro -20~45°C

Lunghezza cavo: 0,75 m

70 mm diameter LED signal towers with integrated BUZZER

MODULAR design, you can easily remove the modules

Programmable functions with DIP SWITCH:

- Buzzer OFF / low (40dB, default) / full intensity (85dB)
- Steady (default) / Flash buzzer
- Steady (default) / Flash light for each color

Available with colors:

- 3 levels, RYG colors
- 4 levels, RYGB colors
- 5 levels, RYGBW colors

Materials: ABS body + PC lenses

Mounting base with 165 mm pole

IP rating: IP53

Connection type: PNP and NPN

Input voltage 24 VDC

Working temperature -20 ~ 45°C

Cable length: 0,75 m

IP53

-20 +45



RoHS
COMPLIANT



DTS-LED 70 LC3




DTS-LED 70 LC4




DTS-LED 70 LC5

DIMENSIONI [mm] - Dimensions [mm]

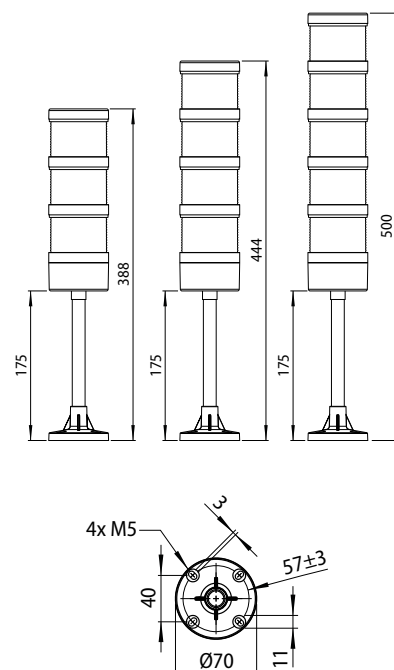

Dip Switch Instruction

No buzzer	1	ON	With buzzer
Low sound	2	INC	Normal sound
Intermittent sound	3	BU	Continuous
flash	4	W	steady
flash	5	C	steady
flash	6	G	steady
flash	7	Y	steady
flash	8	R	steady

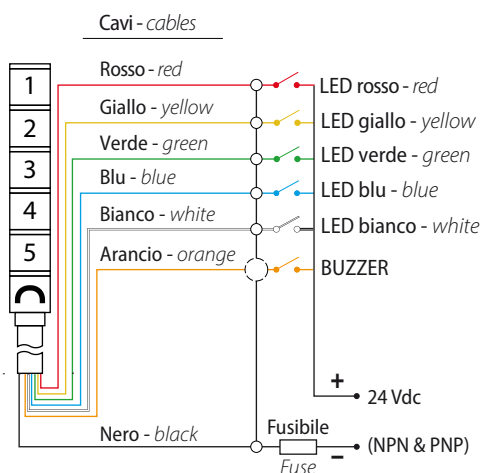

MODELLI Models	Codice Code	Assorbimento Power cons.	Tensione d'ingresso Input voltage	Fascio luminoso Beam	Dimensioni Dimensions	Peso Weight
DTS-LED 70 LC3	3477100300	3,6 W	24 VDC	360°	Ø 70 x 388 mm	450 g
DTS-LED 70 LC4	3477100400	4,8 W			Ø 70 x 444 mm	500 g
DTS-LED 70 LC5	3477100500	6 W			Ø 70 x 500 mm	550 g